

TENSIONING THE PUSH CHAIN


Regarding your question, there is indeed a standard or tolerance that I use for chain tensioning, based on the design philosophy of its components. However, in this case, it is not possible to measure with a caliper.

A) Initial tensioning with the lateral tensioners:

First, the chain must be tensioned using the lateral tensioners.

Tensioning must be applied equally on both sides and the tension should allow proper operation of the compression washers. If over-tightened ,these washers will not function.


Chain tension must be monitored to evaluate wear progression."

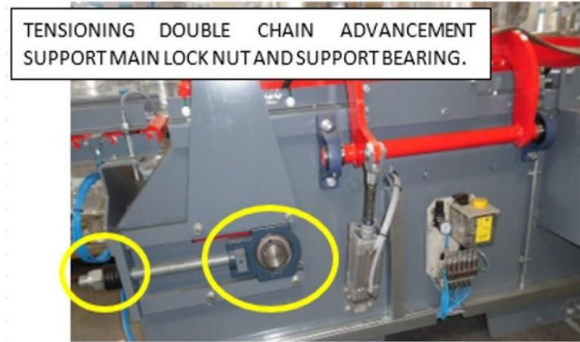

TENSIONER	Date :		
MEASURE	LEFT		
MEASURE	RIGHT		

B) Bilateral tension verification:

On both sides equally (right and left, in the direction of the mold movement), the chain tension is checked by pressing the outer chain inward. This verifies if there is any play or wobble when trying to bring one chain closer to the other. Once confirmed that there is no play and the chain is considered properly tensioned, the final tension measurement from both sides should be recorded for reference.

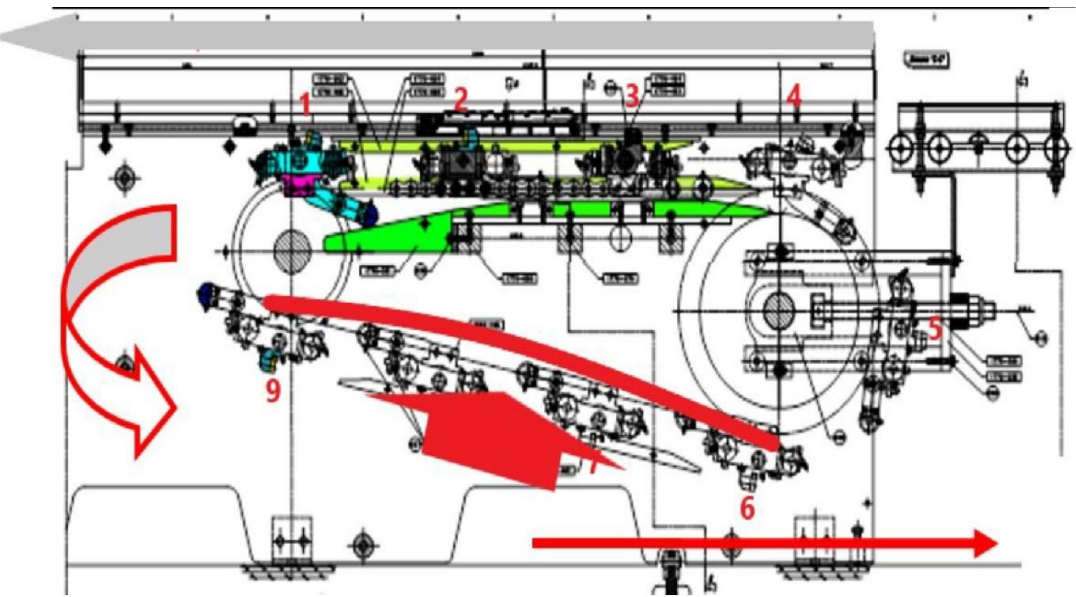

C) Final Check under Actual Operating Conditions:

The definitive verification is performed with the chain moving under production load. The goal is to confirm that the Belleville washers are fulfilling their function as dynamic damping elements. To do this.

- **Action:** Place your hand on the Belleville washer stack.
- **Expected Result:** You should feel a **slight, cyclic compression and decompression** as the chain advances. This indicates that the washers are absorbing load variations and maintaining constant tension.
- **Sign of a Problem (Over-tensioning):** If the washers are completely rigid and show no movement, it signifies over-tensioning. This nullifies their function, puts excessive mechanical stress on the chain and bearings, and demands more work from the motor. In this case, it is necessary to loosen the tension slightly.

